

Atlantic South Plastics, Inc.
8488 Royston Highway
Royston, Georgia 30662



INSTALLATION INSTRUCTIONS

UNIVERSAL PLASTIC TRACTOR AND LAWN MOWER TOP/CANOPY



- READ ALL INSTRUCTIONS BEFORE USING.
- NOTE: ASSISTANCE IS NEEDED WITH THIS PRODUCT INSTALLATION.
- FAILURE TO READ INSTRUCTIONS BEFORE USE COULD RESULT IN INJURY OR DEATH.

CONTENTS: See Fig. 1



FIG. 1

- Contents – SEE FIG. 1:**
- 1 Composite Top w/ Frame;
 - 2 Angle Mounting Brackets;
 - 2 Flat Mounting Plates;
 - 4 3/8"x3.5" Hex Bolts;
 - 4 5/16"x2" Hex Bolts;
 - 8 3/8" Flat Washers
 - 8 5/16" Flat Washers;
 - 4 3/8" Nylon Lock Nuts; and
 - 4 5/16" Nylon Lock Nuts.

****NOTE** PLEASE REMOVE ALL PARTS FROM BOX AND CHECK AGAINST THE CONTENTS LIST BEFORE BEGINNING ASSEMBLY. ANY MISSING OR DAMAGED PARTS NEED TO BE REPORTED TO ATLANTIC SOUTH PLASTICS.**

WARRANTY CARD

Send this copy to: Atlantic South Plastics, - 8488 Royston Highway, Royston, GA 30662

Product Model Number / Name: _____

Date of Purchase: _____ Where Purchased: _____

Print Name: _____

Address: _____

E-mail: _____

My signature below acknowledges that I have read, fully understand, and accept this limited warranty agreement.

Signature: _____ Date _____

WARRANTY INFORMATION

What Is Covered: All defects in materials or workmanship, except slight imperfections in plastic or powder coating, on Atlantic South Plastics, Inc.'s Universal Plastic Tractor or Lawn Mower Top/Canopy properly installed per provided instructions.

For How Long: This warranty, and any implied warranties including merchantability and fitness for a particular purpose, last for one (1) year from the date of purchase if the attached Warranty Card is mailed in. The warranty is not transferable from the original purchaser.

What Atlantic South Plastics Will Do: During the applicable warranty period listed above, Atlantic South Plastics will, at its option, either repair or replace any defective product at no charge. You must pay any labor or shipping charges associated with removing or reinstalling the product. If a specific product has been discontinued, Atlantic South Plastics may, at its option, replace your product with a current product of comparable function and value.

What These Warranties Will Not Cover: These warranties do not cover any damage, defect, or malfunction caused by misuse, abuse, accident, improper installation, modification, improper or inadequate maintenance, or on-road and off-road hazards. **Incidental and consequential damages are not recoverable under this warranty.** Some states or provinces do not allow the exclusion or limitation of incidental or consequential damages, so this exclusion or limitation may not apply to you.

How To Get Service: A defective product may, during the warranty period listed above, be returned to the place of purchase. Alternatively, you may contact Atlantic South Plastics Customer Relations directly at 1-706-245-7075 to obtain information on how to obtain service. Proof of purchase must accompany all warranty returns. Returns made to Atlantic South Plastics will not be accepted without prior authorization from Atlantic South Plastics.

How Does State Law Apply?: This warranty gives you specific legal rights, and you may have other rights which vary from state to state or province to province.

This warranty statement supersedes all previous warranty statements in Atlantic South Plastics catalogs or other marketing materials.



FIG. 2

STEP 1 – SEE FIG. 2 Determine if Roll Over Protection System (ROPS) is forward leaning, straight, or rear leaning. This will determine the mounting holes used on canopy frame.

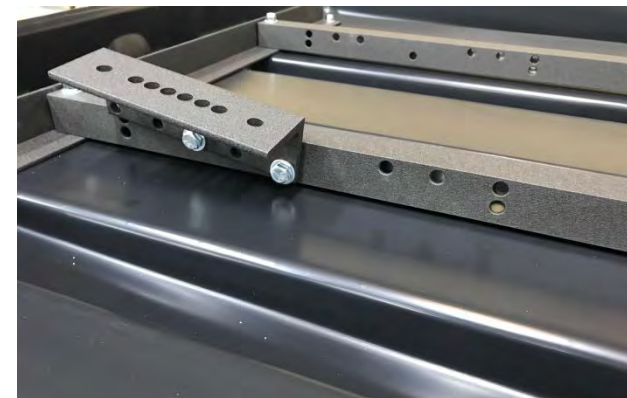


FIG. 3

STEP 2 – SEE FIG. 3 Install (2) Angle Mounting Brackets to Canopy frame using (4) 5/16"x2" Hex Bolts, (8) 5/16" Flat Washers, and (4) 5/16"-18 Nylon Lock Nuts.
****NOTE** MOUNTING PLATES CAN BE MOUNTED TO THE INSIDE OR OUTSIDE AND FRONT OR BACK HOLES OF THE CANOPY FRAME TO ACCOMMODATE YOUR ROPS POSITION.**

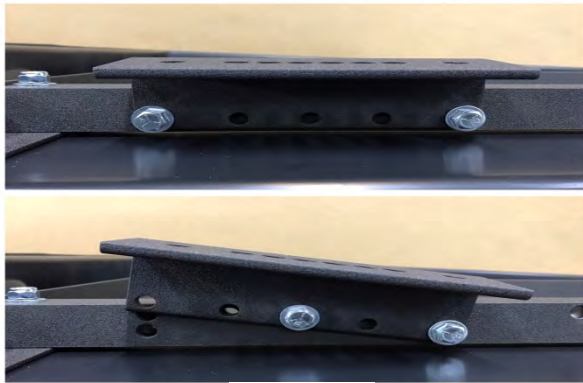


FIG. 4

STEP 3 – SEE FIG. 4 The (2) Angle Mounting Brackets can be mounted level or at a forward or rear angle to provide level canopy after installation.



FIG. 5

STEP 4 – SEE FIG. 5 With Assistance, raise Canopy assembly to the roll bar. Using (4) 3/8" Hex Bolts, (8) 3/8" Flat Washers, and (4) 3/8" Nylon Lock Nuts, attach (2) Flat Mounting Plates to (2) Angle Mounting Brackets with ROPS in-between.



FIG. 6

STEP 5 – SEE FIG. 6 Tighten all hardware securely.



- **CANOPY DOES NOT OFFER ANY ADDITIONAL ROLLOVER PROTECTION.**
- **NEVER ALLOW ANYONE TO SIT OR STAND ON CANOPY.**
- **CANOPY IS NOT INTENDED TO TRANSPORT ANY CARGO AND/OR EQUIPMENT.**

For more information about this or other products,
contact us at:

Atlantic South Plastics, Inc.
8488 Royston Highway, Royston, GA 30662
(706) 245-7075 – www.atlanticsouthplastics.com